


Corrugated Lath Strip™

CLS 2316
CLS 3845-18
CLSW 3845-18
CLS 3845-316

Rainscreen Strips For Siding & Rigid Foam

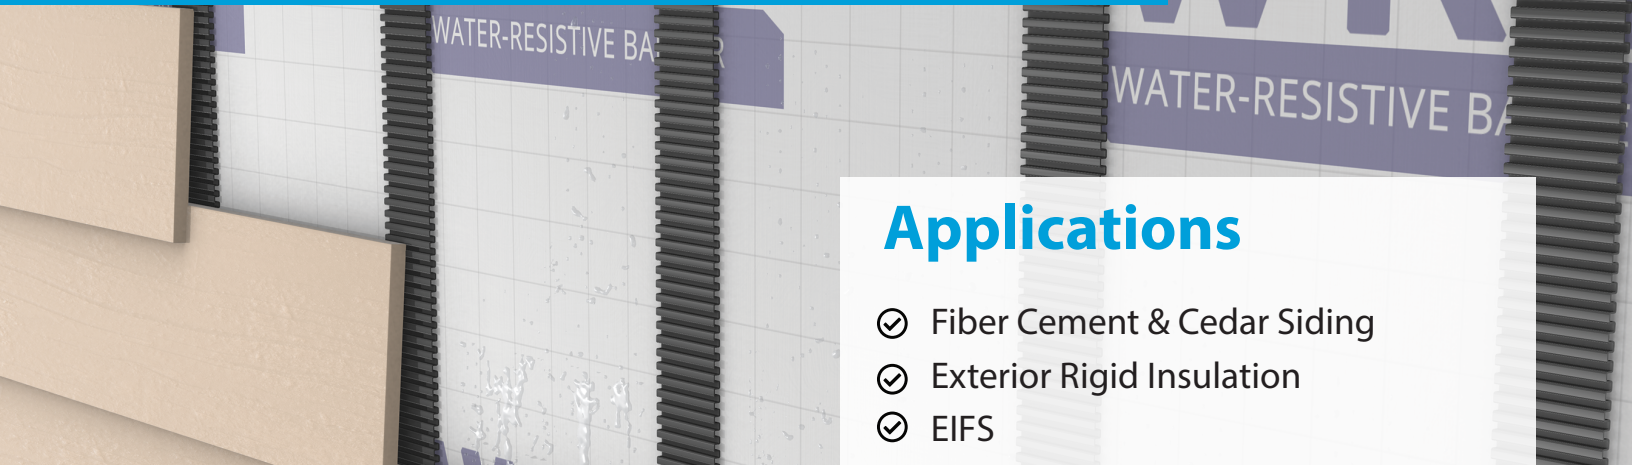

Applications

- ✔ Fiber Cement & Cedar Siding
- ✔ Exterior Rigid Insulation
- ✔ EIFS

An Air Gap Protects You Against Moisture

Think exterior rigid foam insulation is a perfect barrier system? Think again. Learn a lesson from the EIFS industry, a drainage gap behind rigid insulation drains the wall and prevents moisture damage. The same lesson applies to siding. Create a predictable air gap with Corrugated Lath Strip™ from MTI and stay dry.



Corrugated Lath Strip™ creates a 3/16" or 1/8" air gap

The MTI Advantage

- ✔ Creates Rainscreen Air Gap
- ✔ Maintains Drainage & Minimizes Thermal Loss Behind EIFS & Rigid Insulation
- ✔ Easy to Install
- ✔ 100% Recycled Content (black product)



Bundled in 50' rolls - can be trimmed with a utility knife

MTI MASONRY
TECHNOLOGY
INCORPORATED


August 2023

Detail Drawings • Free Consultation • Videos
info@mtidry.com 800-879-3348 MTIdry.com

Installation

- Install Corrugated Lath Strip™ over the water resistive barrier
- Align with framing or fastening pattern of siding
- Attach with staples or other mechanical fasteners
- Install exterior siding or exterior rigid foam insulation per manufacturer's specification

Complete Installation at MTIdry.com/installation

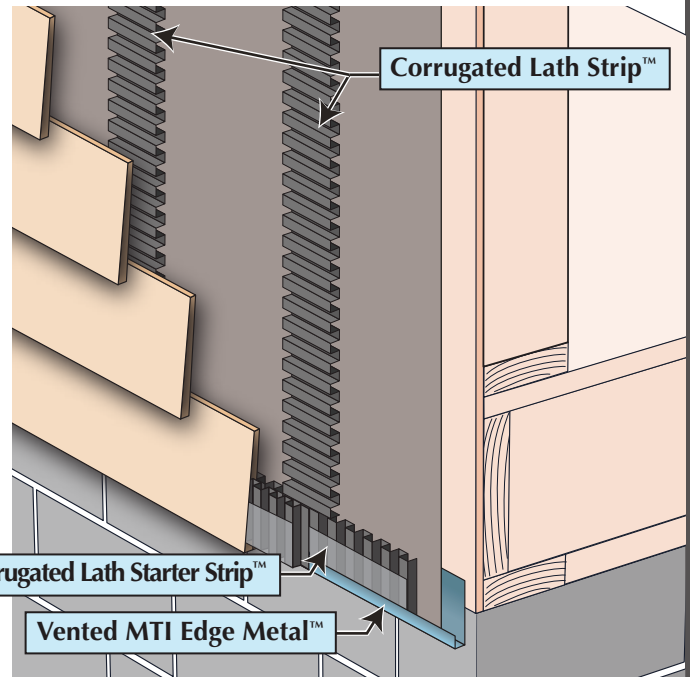


Technical Information



Material Description High impact polystyrene sheets, 0.024 inch (0.6 mm) thick, formed with corrugations.

UV Exposure Over 9 weeks in accelerated UV testing (ASTM G 154)



Fungi Resistance Does not support fungal growth (ASTM C 1338)

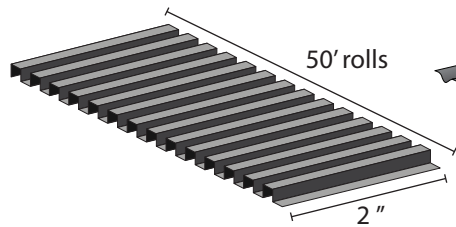


Corrugated Lath Strip™
CLS 2316

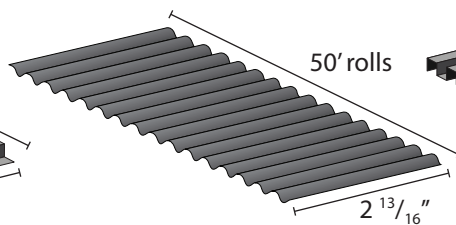

Corrugated Lath Strip™
CLS 3845-18
CLSW 3845-18*

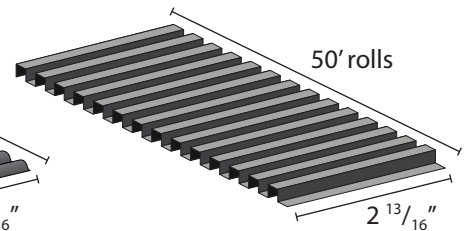

Corrugated Lath Strip™
CLS 3845-316



Depth (drainage gap) 3/16 in (5mm)

1/8 in (3mm)

3/16 in (5mm)

Roll 50 ft

50 ft

50 ft

Box 1,600 ft / 32 Rolls

1,500 ft / 30 Rolls

1,000 ft / 20 Rolls

Pallet 32,000 ft

18,000 ft

12,000 ft

*CLSW utilizes white translucent polystyrene.

Questions about application, installation or ordering?
MTIdry.com/corrugated-lath-strip

MTI MASONRY TECHNOLOGY INCORPORATED